


Performance and Simplicity at the Best Price!

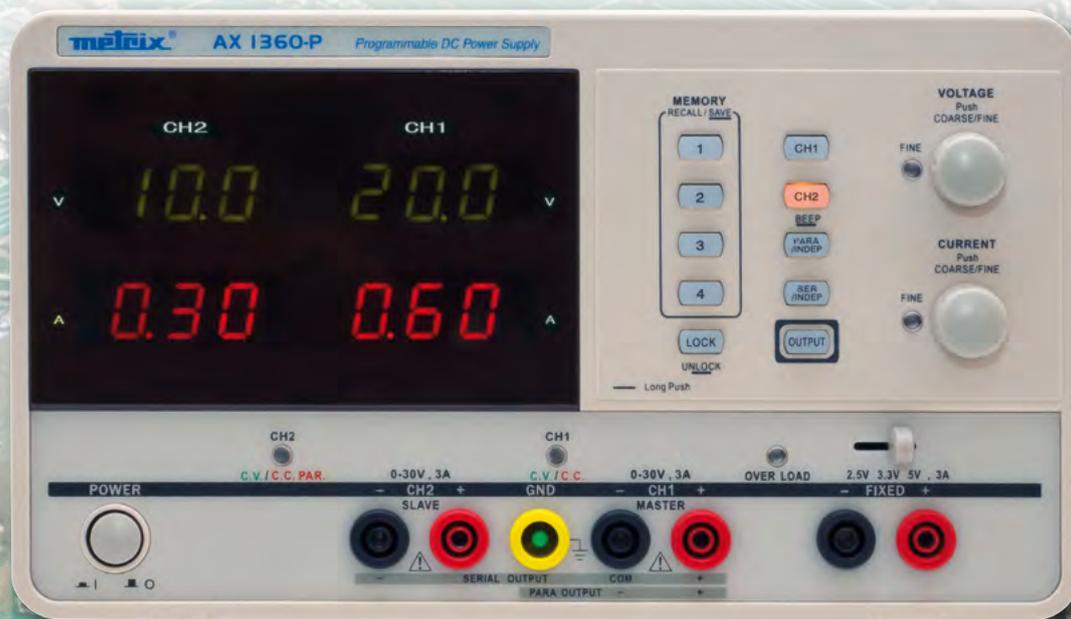

- ✓ **2 adjustable outputs (0-30 V) and 1 selectable fixed output (2.5 V / 3.3 V / 5 V)**
- ✓ **Bright 3-digit colour display of currents and voltages simultaneously**
- ✓ **Simpler use thanks to cordless series or parallel connection**
- ✓ **Faster work with 4 stored configurations available for recall on front panel**
- ✓ **High stability and low drift over time in all modes**
- ✓ **Protection against overvoltages, heating and short-circuits**
- ✓ **Ventilator control according to power output**
- ✓ **USB communication**

AX 1360-P Programmable Controlled Power Supply

Programmable controlled power supplies are widely used in Research and Development and Test laboratories, electrical and electronic product manufacturing, education, etc. The AX 1360-P is simple to use, allowing you to change from series to parallel connection by simple selection, without moving any leads. The power supply then switches automatically between the 2 modes.

TECHNICAL SPECIFICATIONS		AX 1360-P	
Number of outputs	3		
VOLTAGE CONTROL			
Output 1	0 – 30 V		
Output 2	0 – 30 V		
Output 3	2.5 V / 3.3 V / 5 V		
CURRENT CONTROL		INDEPENDENT	PARALLEL
Output 1	3 A		6 A
Output 2	3 A		6 A
Output 3	3 A		-
ACCURACY			
Voltage	±(0.5 % reading + 2 digits)		
Current	±(0.5 % reading + 5 digits)		
RESOLUTION			
Voltage	10 mV (0 to 9.99 V) – 100 mV (10 to 30 V)		
Current	10 mA		
RIPPLE AND NOISE			
Voltage	< 1 mV RMS		
TEMPERATURE COEFFICIENT			
Voltage	< 300 ppm/°C		
ON-LOAD		INDEPENDENT AND PARALLEL	
Voltage control	< 0.1 % + 5 mV		
Current control	< 0.2 % + 3 mA		
PROTECTION			
Short-circuits	Current limitation and visual indicated by red LED		
Overcurrent	Fuse		
“SAVE/RECALL” FUNCTION			
No. of stored configurations	4		
TECHNICAL SPECIFICATIONS			
Display	Digital with LEDs – Simultaneous voltage and current in colour		
Current and voltage adjustment	Output 1 and 2 by potentiometers, Output 3 by switch		
Interface / Software	USB / Drivers LV and LW		
Mains power source	220 V / 50 Hz – 60 Hz		
Safety / Protection	IEC 61010-1 / Fuse		
Mechanical specifications	Dimensions: 310 x 250 x 150 mm – Weight: 7.5 kg		
Warranty	2 years		

State at Delivery

AX1360-P : 1 programmable power supply, 1 power cable, 1 USB cable, software on CD Rom and an Operating Manual.

Reference to order: **AX1360-P**



FRANCE
Chauvin Arnoux
 190, rue Championnet
 75876 PARIS Cedex 18
 Tel: +33 1 44 85 44 38
 Fax: +33 1 46 27 95 59
 export@chauvin-arnoux.fr
 www.chauvin-arnoux.com

UNITED KINGDOM
Chauvin Arnoux Ltd
 Unit 1 Nelson Ct, Flagship Sq, Shaw Cross Business Pk
 Dewsbury, West Yorkshire - WF12 7TH
 Tel: +44 1924 460 494
 Fax: +44 1924 455 328
 info@chauvin-arnoux.co.uk
 www.chauvin-arnoux.com

MIDDLE EAST
Chauvin Arnoux Middle East
 P.O. BOX 60-154
 1241 2020 JAL EL DIB - LEBANON
 Tel: +961 1 890 425
 Fax: +961 1 890 424
 camie@chauvin-arnoux.com
 www.chauvin-arnoux.com

For assistance and ordering